

MMF Frequency Digital Meter



FEATURES

- Measurement up to 400HZ
- Size: 96 W x 48 H x 100 D (mm)
- 2 Alarm Setting function (Optional)
- RS-485 Modbus RTU output function (Optional)
- DC 4~20mA output function (Optional)



FUNCTION SELECTION

MMPF - code1 code2 code3 code4 code5 code6


CODE 1 INPUT FREQUENCY		CODE 2 RANGE		CODE 3 OUTPUT1		CODE 4 OUTPUT2		CODE 5 AUX.POWER	
1	50HZ	1	± 1HZ	1	2 Alarm	1	RS-485	3	DC 22~72V
2	60HZ	2	± 2HZ	2	DC 4~20mA	0	None	6	AC/DC85~265V
Y	Other	3	± 3HZ	0	None	Y	Other	Y	Other
		4	± 5HZ	Y	Other				
		5	± 10HZ						
		Y	Other						

SPECIFICATIONS


Accuracy	: ±0.5%RD at 23°C ±3°C	Output Function	: 4~20mA330Ω at 20ma (Optional)
Display Range	: 0.56"High brightness red LED 5-digit 0~65535	Alarm Function	: 2Alarm Setting (Optional)
Input Range	: Input 30~600V	Dielectric Strength	: 2.0KV 50/60HZ AC / Min Between Input / Power / Case
Input Burden	: Voltage0.25VA ; Current0.2VA@50/60Hz	Power Supply	: AC 85~265V 50 / 60Hz DC 100~300V
Input Frequency	: 0~400HZ	Dimension	: 96 W X 48 H X 100 D mm.
Input Over	: Normal AC 440V,Voltage Over 600V Continuou:	Cut-out	: 92W x 44H < mm >
Digital Output Load	: RS-485 MODBUS RTU(Optional)	Mounting	: Panel Flush Mounting
Baudrate	: 2400.4800.9600.19200.38400.57600	Housing Material	: ABS Plastic, Self-Extinguishing
Address	: 1~255	Operating Condition	: -10°C~55°C 20 ~ 95% RH Non-Condensed.
		Storage Condition	: -40°C~75°C 20 ~ 95% RH Non-Condense

MMF Frequency Digital Meter

SIZE (mm)

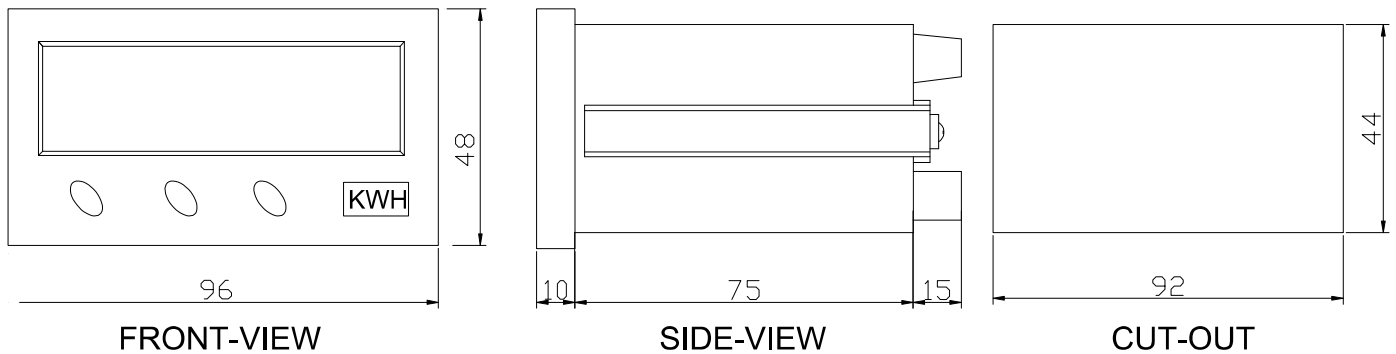

TERMINALS & CONNECTION

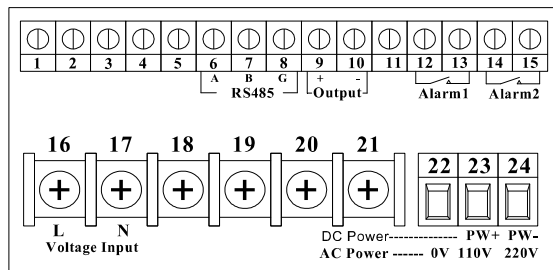

KUSAM-MECO[®]
An ISO 9001:2008 Company

G-17, Bharat Industrial Estate, T. J. Road, Sewree (W), Mumbai - 400 015. INDIA.
Sales Direct.: 022-24156638, **Tel. :** 022-24124540, 24181649, **Fax :** 022-24149659
Email : kusam_meco@vsnl.net, **Website :** www.kusamelectrical.com